


# Datasheet Actuator: *Curve® unplugged A1930E10*





- Active length: 19 mm
- Module size: 39 mm x 30 mm x 1.8 mm
- Bending: high (**E10**)
- Weight: 2.6 g + hosting structure
- Hosting structure: steel + rivets, **tip 25 mm**  
size 74 x 30 x 0.35 mm<sup>3</sup>
- Load range with high cycling stability (> 300.000)
  - at module edge: 820 g
  - at 25 mm:** 440 g
  - at 50 mm: 300 g

**Actuator**  
**A1930E10**

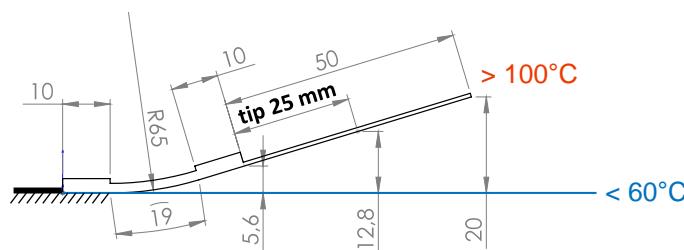

**M1930E10 – Actuator Module only**

- Operating mode: **unplugged**
- Thermal activation by: external heating
- Possible external heating: convection, radiation, conduction
- Maximum temperature: 130°C (permanent)  
>150°C (short-term)



© CompActive GmbH


All values are only estimations!

## Customized, high-performance actuators by ...





### ... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability



### ... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance



### ... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



### ... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH