


Datasheet Actuator: *Curve® unplugged A1930E24*





- Active length: 19 mm
- Module size: 39 mm x 30 mm x 3.3 mm
- Bending: low (**E24**)
- Weight: 5.5 g + hosting structure
- Hosting structure: steel + rivets, **tip 25 mm**
size 74 x 30 x 0.50 mm³
- Load range with high cycling stability (> 300.000)
 - at module edge: 2070 g
 - at 25 mm:** 1110 g
 - at 50 mm: 760 g

Actuator
A1930E24

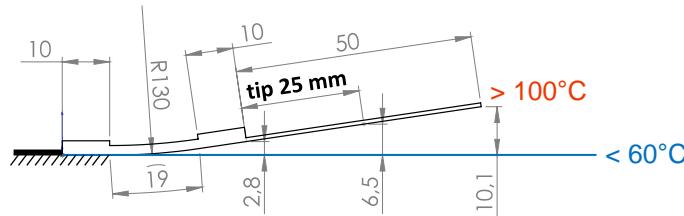

M1930E24 – Actuator Module only

- Operating mode: **unplugged**
- Thermal activation by: external heating
- Possible external heating: convection, radiation, conduction
- Maximum temperature: 130°C (permanent)
>150°C (short-term)

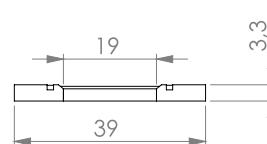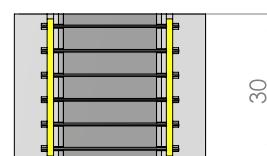

© CompActive GmbH


All values are only estimations!

Customized, high-performance actuators by ...




... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

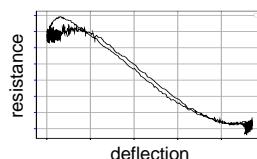

... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

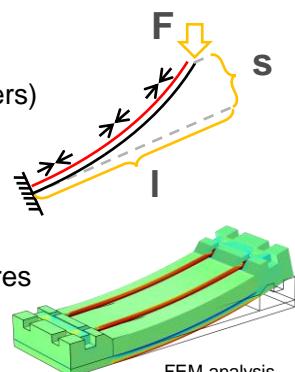


... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



... various electrical connection

- crimping
- soldering
- plugging in
- welding

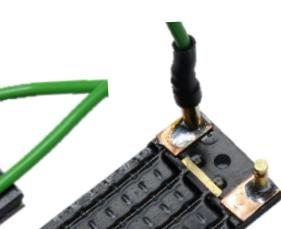

© CompActive GmbH