


Datasheet Actuator: *Curve® plugged A2930E24*




- Active length: **29 mm**
- Module size: **49 mm x 30 mm x 3.3 mm**
- Bending: **low (E24)**
- Weight: **5.9 g + hosting structure**
- Hosting structure: **steel + rivets, tip 25 mm
size 84 x 30 x 0.50 mm³**
- Load range with high cycling stability (> 300.000)
 - at module edge: **1540 g**
 - at 25 mm:** **940 g**
 - at 50 mm: **670 g**

Actuator
A2930E24

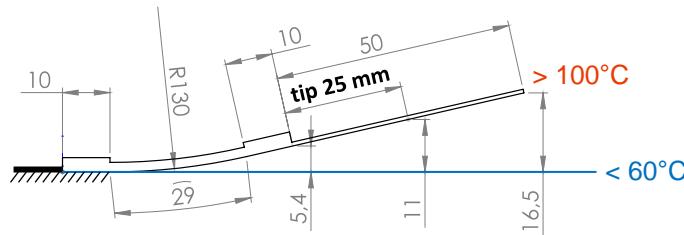

M2930E24 – Actuator Module only

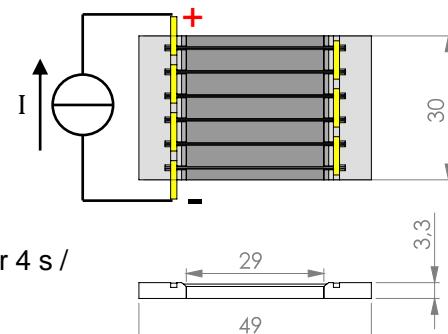

- plugged**
- Operating mode: **plugged**
 - Thermal activation by: resistive heating
 - Electronic circuit: all wires in series
 - Resistivity: 0.9 Ohm
 - Full Activation (DC): e.g. 3 A for 15 s / 4 A for 4 s / 5 A for 1.3 s

© CompActive GmbH



All values are only estimations!

Customized, high-performance actuators by ...





... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

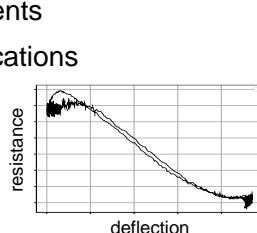

... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

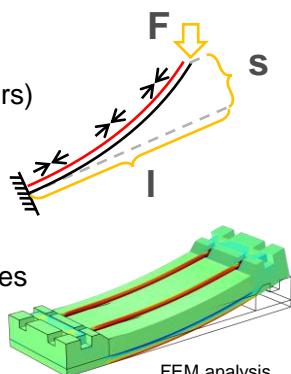

... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH