


# Datasheet Actuator: *Curve® unplugged A2950E24*




- Active length: **29 mm**
- Module size: **49 mm x 50 mm x 3.3 mm**
- Bending: **low (E24)**
- Weight: **9.9 g + hosting structure**
- Hosting structure: **steel + rivets, tip 25 mm**  
size **84 x 50 x 0.50 mm<sup>3</sup>**
- Load range with high cycling stability (> 300.000)
  - at module edge: **2570 g**
  - at 25 mm:** **1560 g**
  - at 50 mm: **1120 g**

**Actuator**  
**A2950E24**

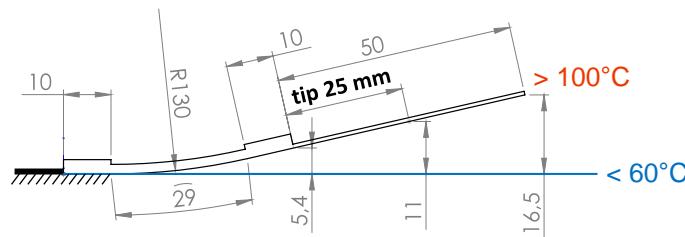

**M2950E24 – Actuator Module only**

- Operating mode: ***unplugged***
- Thermal activation by: **external heating**
- Possible external heating: **convection, radiation, conduction**
- Maximum temperature: **130°C (permanent)**  
**>150°C (short-term)**

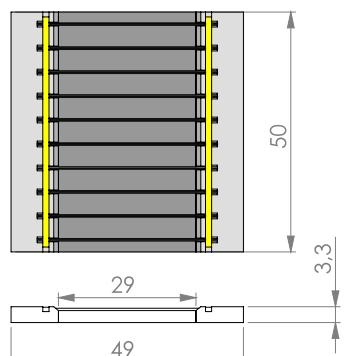

© CompActive GmbH


All values are only estimations!

## Customized, high-performance actuators by ...




### ... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

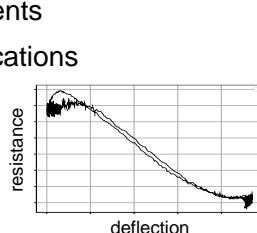

### ... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

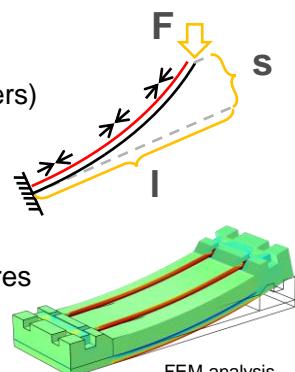

### ... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



### ... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH