


Datasheet Actuator: *Curve® unplugged A3910E24*




- Active length: **39 mm**
- Module size: **59 mm x 10 mm x 3.3 mm**
- Bending: **low (E24)**
- Weight: **2.1 g + hosting structure**
- Hosting structure: **steel + rivets, tip 25 mm**
size **94 x 10 x 0.50 mm³**
- Load range with high cycling stability (> 300.000)
 - at module edge: **410 g**
 - at 25 mm:** **270 g**
 - at 50 mm: **200 g**

Actuator
A3910E24

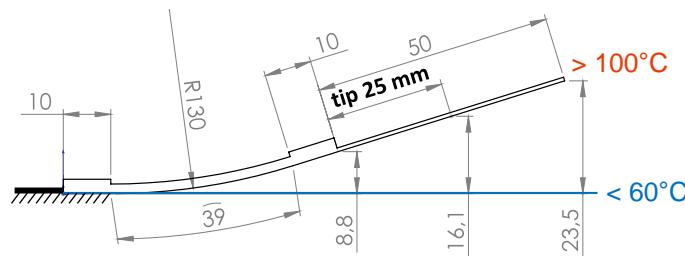

M3910E24 – Actuator Module only

- Operating mode: **unplugged**
- Thermal activation by: external heating
- Possible external heating: convection, radiation, conduction
- Maximum temperature: 130°C (permanent)
>150°C (short-term)

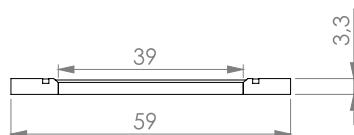

© CompActive GmbH


All values are only estimations!

Customized, high-performance actuators by ...





... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability



... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

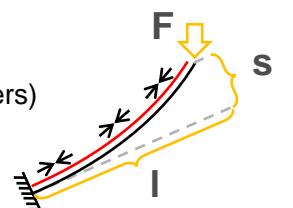

... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH