


# Datasheet Actuation Module: *Curve® plugged 1930E20*



- Active length: 19 mm
- Module size: 39 mm x 30 mm x 2.5 mm
- Bending: medium (**E20**)
- Module weight: 3.9 g
- Example hosting structure: stainless steel 0.45 mm
- Load range with high cycling stability (> 300.000)
  - at module edge: 1810 g
  - at 25 mm: 970 g
  - at 50 mm: 660 g

## Hosting structure and actuation module

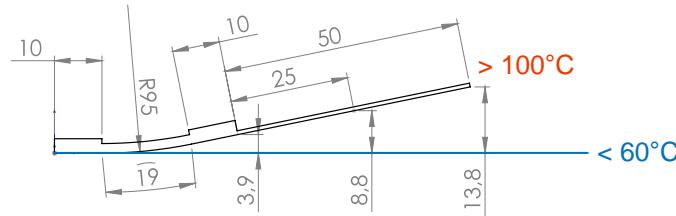

- Operating mode: **plugged**
- Thermal activation by: resistive heating
- Electronic circuit: all wires in series
- Resistivity: 0.6 Ohm
- Full Activation (DC): e.g. 3 A for 15 s / 4 A for 4 / 5 A for 1.3 s


## plugged

resistive heating

all wires in series

0.6 Ohm

e.g. 3 A for 15 s / 4 A for 4 /  
5 A for 1.3 s

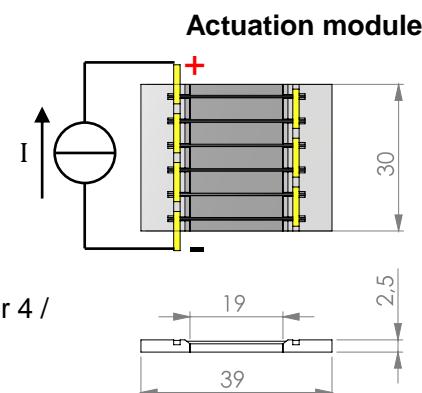

© CompActive GmbH


All values are only estimations!

## Customized high performance actuation modules by ...





### ... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability



### ... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

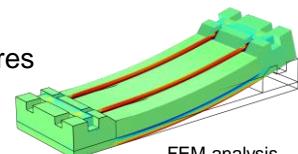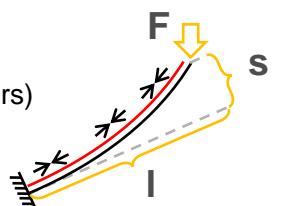


### ... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on



### ... various electrical connection

- crimping
- soldering
- plugging in
- welding

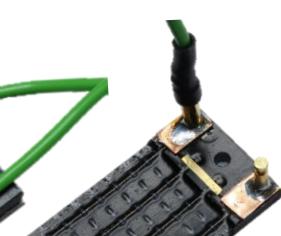

© CompActive GmbH