


Datasheet Actuation Module: *Curve*® plugged 2930E24

- Active length: **29 mm**
- Module size: **49 mm x 30 mm x 3.3 mm**
- Bending: **low (E24)**
- Module weight: **5.9 g**

Hosting structure and actuation module


- Example hosting structure: stainless steel 0.55 mm
- Load range with high cycling stability (> 300.000)

at module edge:	1540 g
at 25 mm:	940 g
at 50 mm:	670 g

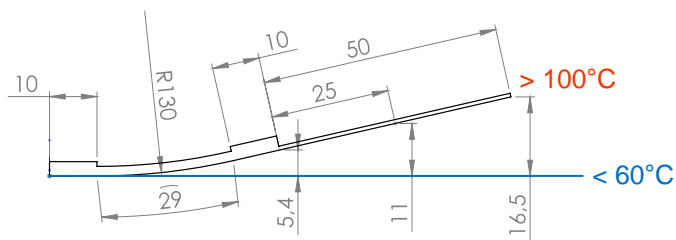

Actuation module

- Operating mode: **plugged**
- Thermal activation by: **resistive heating**
- Electronic circuit: **all wires in series**
- Resistivity: **0.9 Ohm**
- Full Activation (DC): **e.g. 3 A for 15 s / 4 A for 4 s / 5 A for 1.3 s**

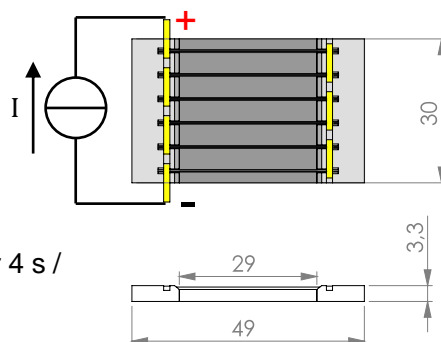


© CompActive GmbH

All values are only estimations!

Customized high performance actuation modules by ...


... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

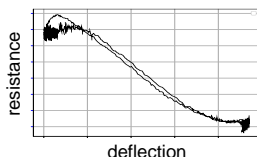

... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

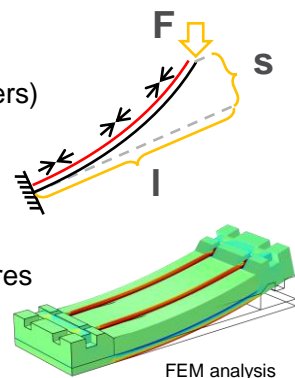

... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on

... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH