



Datasheet Actuation Module: *Curve*® plugged 2940E24

- Active length: **29 mm**
- Module size: 49 mm x **40 mm** x 3.3 mm
- Bending: low (E24)
- Module weight: 7.9 g
- Example hosting structure: stainless steel 0.55 mm
- Load range with high cycling stability (> 300.000)
 - at module edge: 2050 g
 - at 25 mm: 1250 g
 - at 50 mm: 900 g

Hosting structure and actuation module

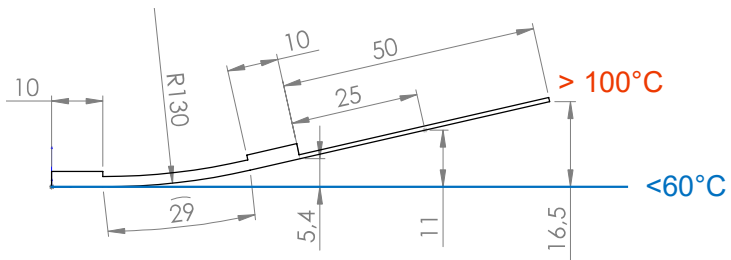

Actuation module

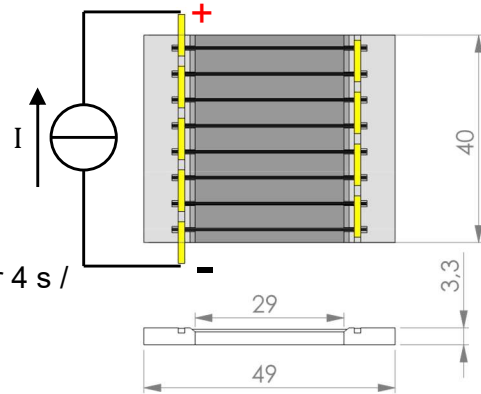

- Operating mode: **plugged**
- Thermal activation by: resistive heating
- Electronic circuit: all wires in series
- Resistivity: 1.2 Ohm
- Full Activation (DC): e.g. 3 A for 15 s / 4 A for 4 s / 5 A for 1.3 s


© CompActive GmbH

All values are only estimations!

Customized high performance actuation modules by ...


... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability



... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

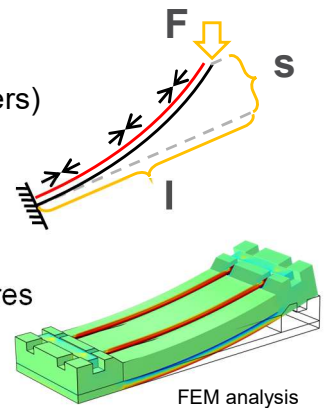

... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on

... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH