



Datasheet Actuation Module: *Curve*® plugged 3930H

- Active length: **39 mm**
 - Module size: **59 mm x 30 mm x 1.8 mm**
 - Bending: **high (H)**
 - Module weight: **3.5 g**
-
- Example hosting structure: stainless steel 0.35 mm
 - Load range with minor reduction of deflection and high cycling stability (>200 000)
 - at module edge: **243 g**
 - at 25 mm: **160 g**
 - at 50 mm: **120 g**
-
- Operating mode: **plugged**
 - Thermal activation by: **resistive heating**
 - Electronic circuit: **all wires in series**
 - Resistivity: **1.2 Ohm**
 - Full Activation (DC): **e.g. 3 A for 15 s / 4 A for 4**

Hosting structure and actuation module

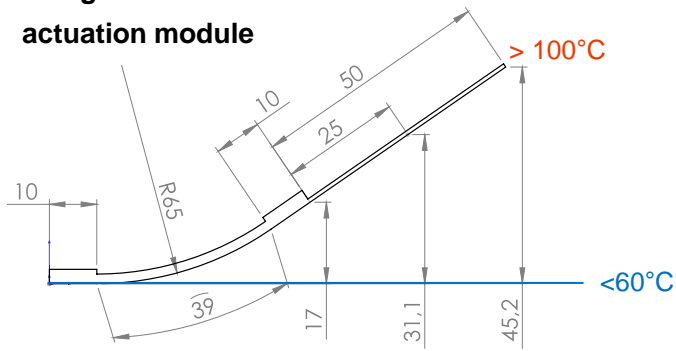

Actuation module

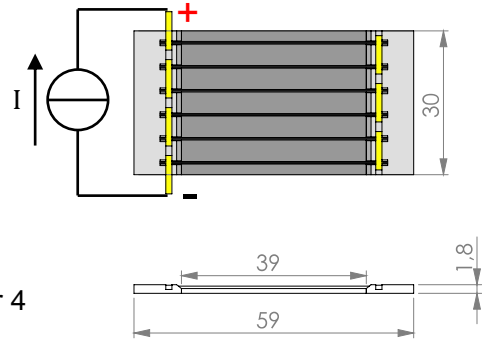


© CompActive GmbH

All values are only estimations!

Customized high performance actuation modules by ...



... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

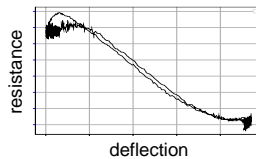

... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance



... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on

... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH