



Sample Actuator *Curve*® plugged 2940L



- Module size: 49 mm x 40 mm x 3.3 mm
- Active length: 29 mm
- Module weight: 7.9 g
- Load range: up to 696 g at tip
→ with high cycling stability ≥ 200.000 cycles

- Dimensions of module size customizable
- Individual deflection
- Flexible mechanical and electrical interfaces
- Electrical resistivity can be modified
- All materials are RoHS-compliant

@ ≥100°C

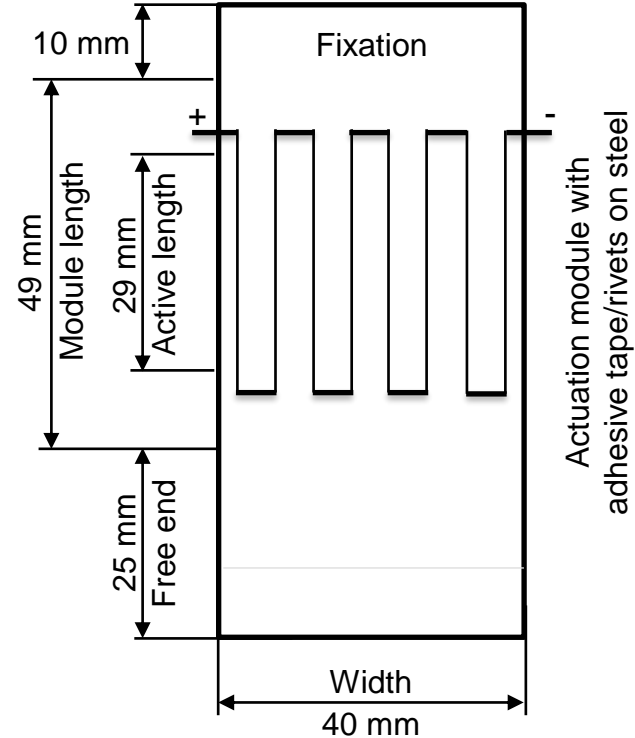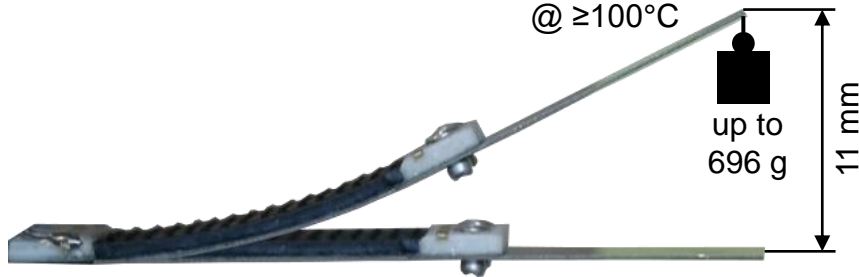


application notes on the back

Sample Actuator *Curve*[®] plugged 2940L



application notes


Curve plugged[®]

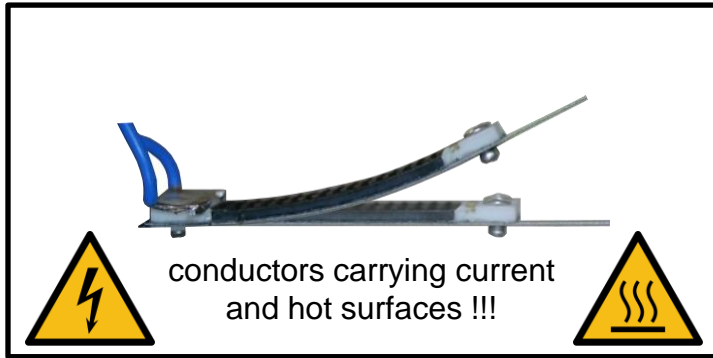

conductors carrying current
and hot surfaces !!!

Electrical resistivity: 1.2 Ω
**Activation of a cooled down actuator
in calm air at 23°C by heating current /
max time:** e.g. 2.5A/45s; 3A/15s; 4A/4s; 5A/1s

Curve unplugged[®]

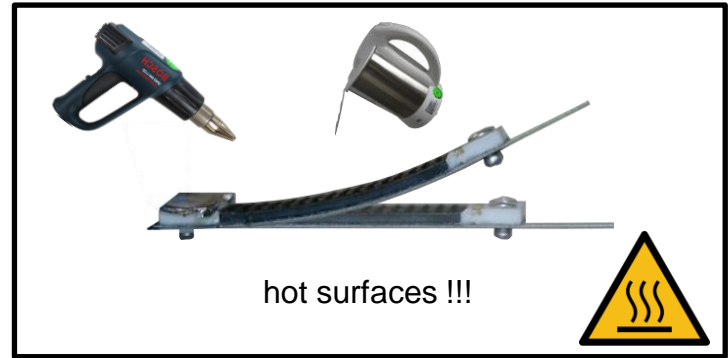

hot surfaces !!!

Begin of actuation: ca. 60°C
End of actuation: ca. 100°C
Maximum temperature: 130°C

- **Current and time period only as a guide for a cooled down actuator in calm air at 23°C**
→ **Risk of overheating for subsequent activation** without adaption of current and time period
- To avoid damage do not exceed maximum temperature either electrical or thermal
- Uncontrolled electrical heating can lead to overheating → **risk of fire!**
- Operate exclusively with controllable power source in the SELV (safe extra-low voltage) range